


# EP22A PRO

DIGITAL PODIUM



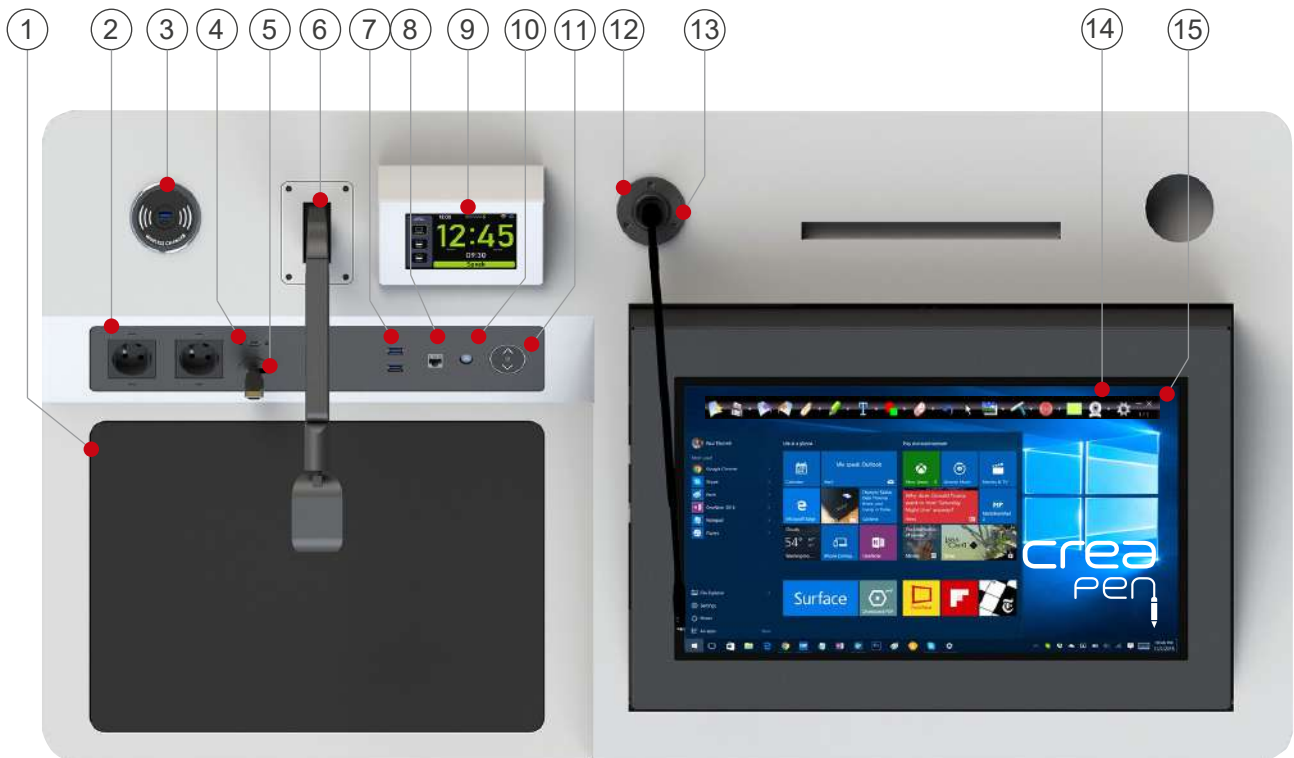

- 1 - Drawer
- 2 - Power 220V AC
- 3 - Wireless Charger
- 4 - Type-C
- 5 - Cable Retractor
- 6 - Visualizer
- 7 - USB
- 8 - RJ45
- 9 - Clock & Timer
- 10 - PC On/Off
- 11 - Height Adjustment
- 12 - Shock Mount
- 13 - 18" Microphones
- 14 - 22" Multi Touch Screen
- 15 - Creapen Annotation Software



Complex presentations that require multiple additional devices, communication and power ports. AV control panels, EP22A Pro covers all of them. Professional and more technical meetings, conferences and classes are the places for EP22A Pro. Well designed work areas on top surface allow the speaker to make the meeting rooms, and lecture halls. It is equipped with personal computer

## EP22A Pro

	EP22A PRO
Multi touch speaker screen	22"
Player PC : Intel i3, 8 GB Ram, 128 GB SSD, Windows 11 Pro	✓
Remotely Controlled Electrical Lifting Column for Height Adjustment	✓
Switch & Scalar (HDMI & TYPE-C)	✓
Creapen Annotation Software	✓
5" Digital Touch Timer	✓
Visualizer	✓
Speaker	Optional
Stereo Amplifier	Optional

# Speaker Screen

■ 22" iiyama




22" 10 point touch monitor with edge-to-edge glass and AMVA panel

With its Full HD (1920x1080) resolution and accurate Projective Capacitive 10 point touch technology, the ProLite T22 delivers seamless and accurate touch response.

The AMVA panel technology guarantees high performance with excellent colour reproduction and high contrast, making it an excellent choice for a vast array of demanding interactive applications.

## Touch Technology

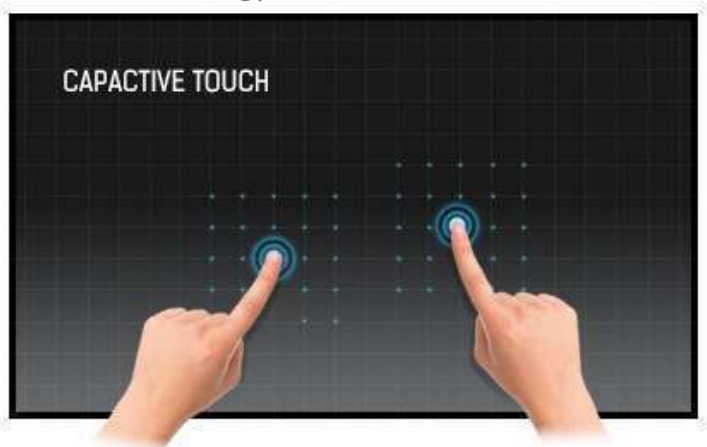

This technology uses a sensor-grid of micro-fine wires integrated into the glass that covers the screen. Touch is detected because electrical characteristics of the sensor grid change when human finger is placed on the glass. Thanks to the glass overlay this technology is highly durable, and the touch function remains unaffected even if the glass is scratched.

It offers perfect picture performance and will work with human finger (also latex gloved) and stylus-pen.

Specifications	
Diagonal	21.5"; 55cm
Aspect Ratio	16 : 9
Panel Amva	LED
Native Resolution	Full HD 1080p, 1920 x 1080 ( 2.1 megapixel)
Brightness	250 cd/m <sup>2</sup> typical
Brightness	215 cd/m <sup>2</sup> with touch panel
Advanced Contrast	12 000 000 : 1 ACR
Static Contrast	3 000 : 1 with touch panel
Response Time	8 ms
Viewing Zone	horizontal/vertical: 178°/ 178°; right/left: 89°/ 89°; up/down: 89°/ 89°
Display Colour	16.7 million
Blue Light Reducer	yes
Touch Technology	projective capacitive
Touch Points	10
Glass Hardness	7H minimum
Light Transmittance	85%
Display Area	H X W 268.1 x 476.6 mm; 10.6" x 18.8 "
Pixel Pitch	H X V 0.248 x 0.248 mm
Horizontal Sync	30 - 80 KHz
Vertical Sync	56 - 75 Hz
Synchronization	Separate Sync
INTERFACES / CONNECTORS / CONTROLLERS	
Analog Input Connector	VGA
Digital Input Connector	DVI, HDMI
USB HUB	UP 1 x USB 3.0 / DOWN 4 x USB 3.0
Controls	USB (touch), USB 3.0

# Microphone

## Shure 18 CVG18S-B Microphone



Designed with dual gooseneck sections for full articulation, the CVG18 provide scalable, best-in-class performance in a wide variety of locations.

### Features

- Cardioid polar pattern with tailored response for speech
- Dual-section gooseneck enables ease of positioning and placement options
- Included Flange Mount and available snap-fit windscreens (ACVG4WS-B – 4 pack)
- With Mute switch/LED,
- Guards against unwanted RF Interference from portable wireless devices gh resistance to intense nearby radio signals
- Superior Shure design and rugged, dependable construction
- Noise by up to 20 dB.

### Specifications


Cartridge Type Electret Condenser	Electret Condenser
Frequency Response	70–16000 Hz
Polar Pattern	Cardioid
Output Impedance	180 Ω
Sensitivity (at 1 kHz , open circuit voltage)	–33 dBV/Pa[1] (22 mV)
Maximum SPL (1 kHz at 1% THD)	120 dB SPL
Signal to Noise Ratio (referenced at 94 dB SPL)	67 dB
Dynamic Range	93 dB
Self Noise (equivalent SPL, A-weighted, typical)	27 dB SPL
Common Mode Rejection (10 Hz to 100 kHz)	45 dB
Preamplifier Output Clipping Level (1% THD)	–7 dBV
Polarity	3
Power Requirements	11–52 V DC[4], 2.0 mA



## Shure A400SMXLR Shock Mount

### Shure A400SMXLR Shock Mount Socket

A400SMXLR Shock Mount decouples a microphone from the mounting surface and reduces transmission of impact or surface

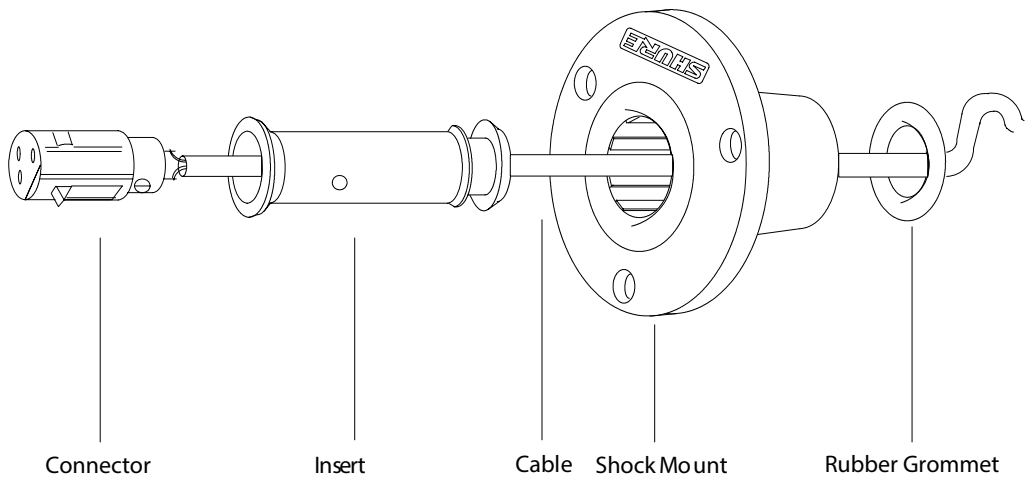

# Switch & Scaler

## ■ 3x2 4K HDMI and USB-C Scaled Out Matrix

### Front Panel



### Rear Panel



This 3x2 matrix switch is designed for a wide range of flexibility when it comes to inputs, outputs, and control. The two most common video input interfaces (HDMI, USB-C) are included along with a pair of HDMI outputs and a single analog audio breakout port, providing the ultimate in source compatibility and flexibility.

All inputs and outputs are HDCP 2.2 compliant and provide support for resolutions up to a maximum of 4K@60Hz (4:4:4, 8-bit or 4:2:0, 12-bit HDR). The included USB-C input complies with the USB 3.0 standard and supports audio/video bypass, and device charging, as well as the ability to provide a network connection.

This matrix also includes standard USB 3.0 hub functionality with two host ports (one Type-B and one Type-C), plus two device ports (Type-A) for a flexible KVM configuration.


## Features

- HDMI 2.0 and DVI 1.0 compliant
- HDCP 1.x and 2.2 compliant
- 1 USB Type-C and 2 HDMI inputs
- 2 HDMI outputs with independent matrix switching and auto-switch support
- Supports up to 4K UHD (18Gbps, 4K@60Hz 4:4:4, 8-bit) video input and output
- Supports Deep Color input and output up to 12-bit
- Supports 10-bit and 12-bit HDR (High Dynamic Range) input/output
- Supports pass-through of many audio formats including 8 channel LPCM, Bitstream, and HD Bitstream
- HDMI Output A supports 4K to 1080p downscaling
- USB-C port functionality is switchable between a A/V focused mode
- (4K@60Hz) with USB 2.0 data and a mixed media mode with simultaneous A/V (4K@30Hz), USB 3.0, and Ethernet support
- USB-C port provides up to 20V/3A (60W) power to the connected device
- Supports pass-through of 8 channel LPCM, bitstream & HD bitstream audio formats
- Analog audio output source audio can be from output A or B (LPCM 2.0 sources only)
- Integrated USB 3.0 hub with one dedicated Type-B host port and two Type-A device ports
- Supports basic signal event automation (via RS-232, Ethernet, or CEC)
- Controllable via front panel 5" Timer screen

# Switch & Scaler

## ■ Operation Controls and Functions

### Front Panel

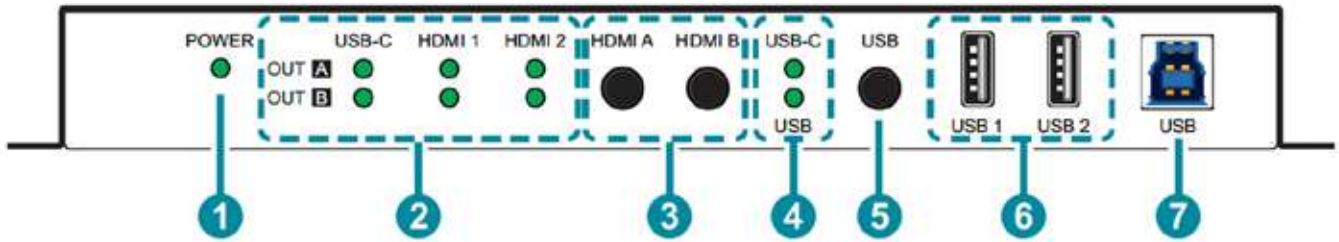

**1-POWER LED:** This LED will illuminate to indicate the unit is on and receiving power.

**2-OUT A & B LEDs:** The illuminated LED indicates which source is currently selected for each output.

**3-HDMI A & HDMI B Buttons:** Press either button to sequentially switch through the available inputs for the associated HDMI output.  
EGE-UHD-332C 3x2 4K HDMI and USB-C Scaled Out Matrix


**4-USB-C & USB LEDs:** The illuminated LED indicates which USB host port is currently active.

**5-USB Button:** Press this button to select which USB host port is currently active. "USB" selects the USB Type-B port on the front of the unit,

**6-USB 1 & 2 Device Ports (Type-A):** Connect directly to standard USB devices such as a mouse, keyboard or flash drive to extend their USB functionality to the currently active USB host port.

**7-USB Host Port (Type-B):** Connect directly to a standard USB host such as a PC or laptop to extend their USB functionality to all currently connected USB devices.

### Rear Panel

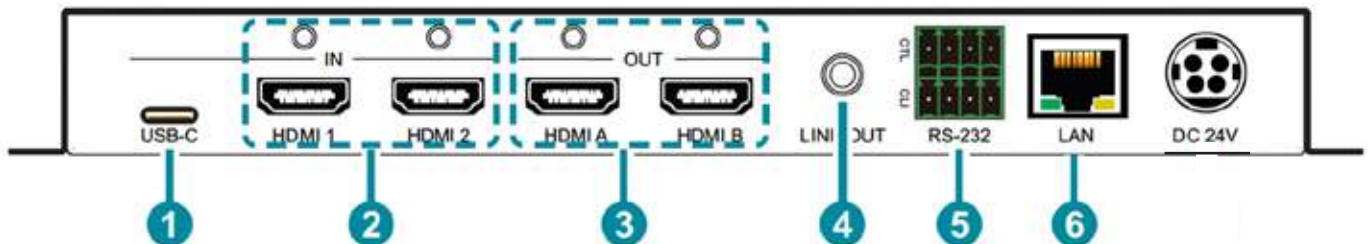

**1-USB-C IN Port:** Connect to USB Type-C host or video source equipment such as a PC or laptop. When the USB-C port has "Super Speed" support active, this port can support 4K30 A/V, Ethernet, and USB simultaneously. When "Super Speed" is disabled, this port will support full bandwidth 4K60A/V content but USB data functionality will be limited to USB 2.0 levels.

**2- HDMI IN 1 & 2 Ports:** Connect to HDMI source equipment such as media players, game consoles, or set-top boxes. DVI sources are supported with the use of an HDMI to DVI adapter.

**3- HDMI OUT A & B Ports:** Connect to HDMI TVs, monitors, or amplifiers for digital video and audio output.


**4- LINE OUT Port:** Connect to powered speakers, headphones, or an amplifier for analog stereo audio output extracted from the selected HDMI output (LPCM 2.0 sources only).

**5- RS-232 CTL 4-pin Terminal Block:** Connect to the device you wish to control via a 3-pin adapter cable to receive event automation RS-232 commands from the unit.


**6- LAN Port:** Connect directly, or through a network switch, to your PC/laptop to control the unit via Telnet/WebGUI and to extend the network across the USB Type-B and Type-C ports.

# Switch & Scaler

## ■ Connection Diagram

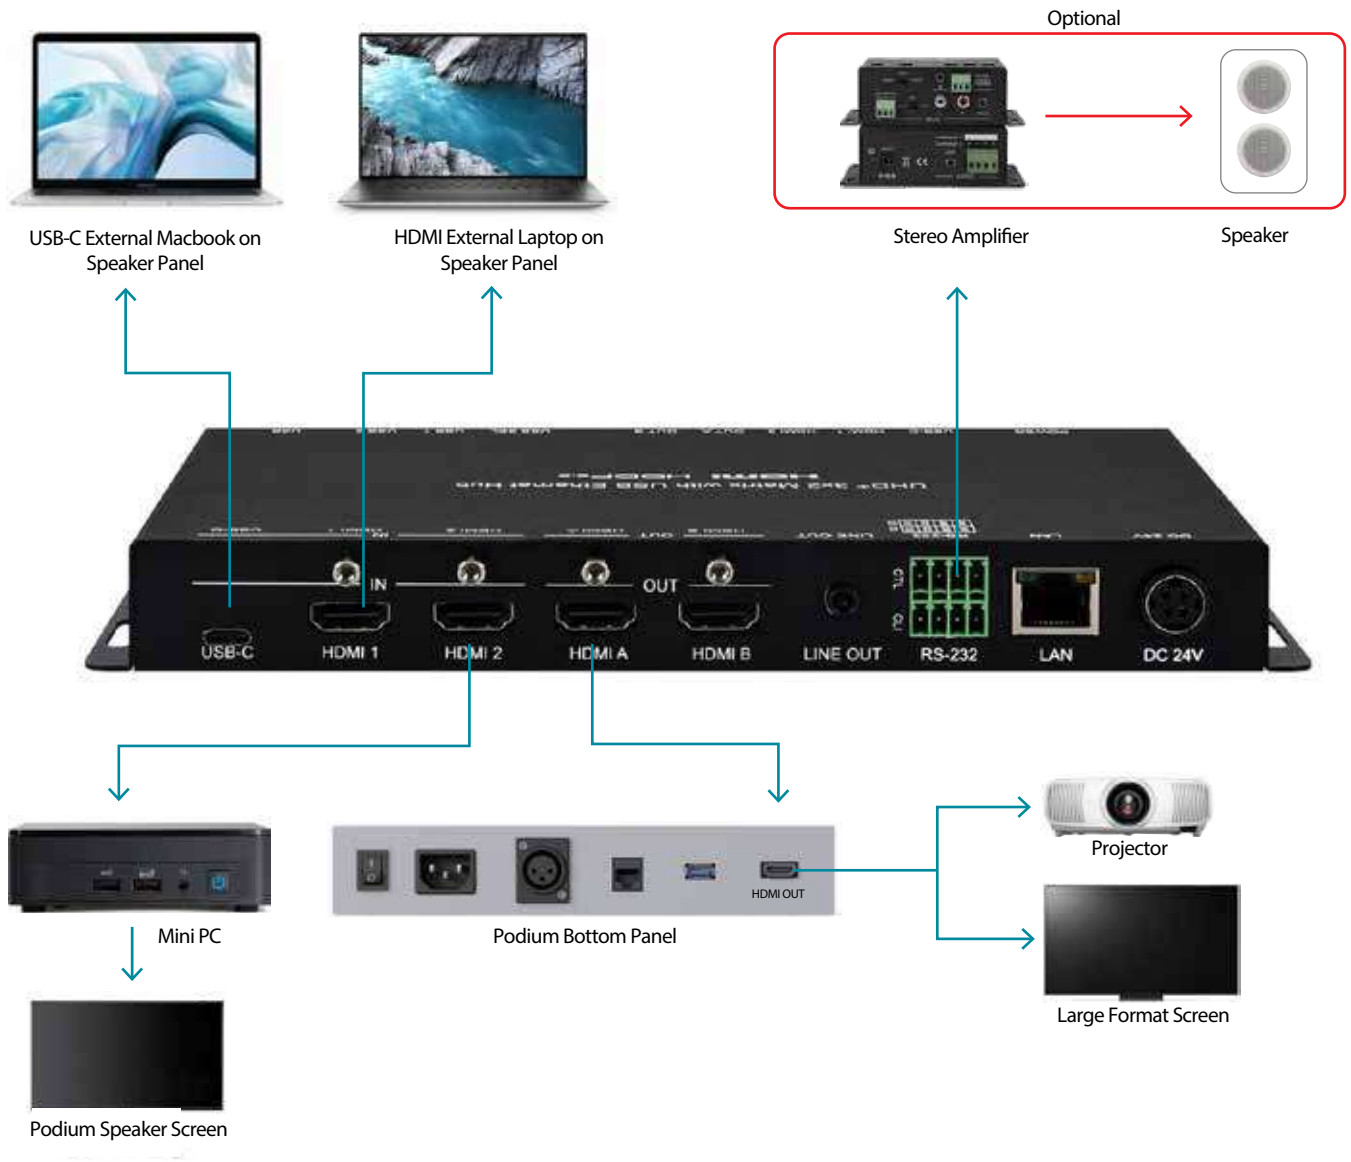

## ■ Digital Source Selection Diagram

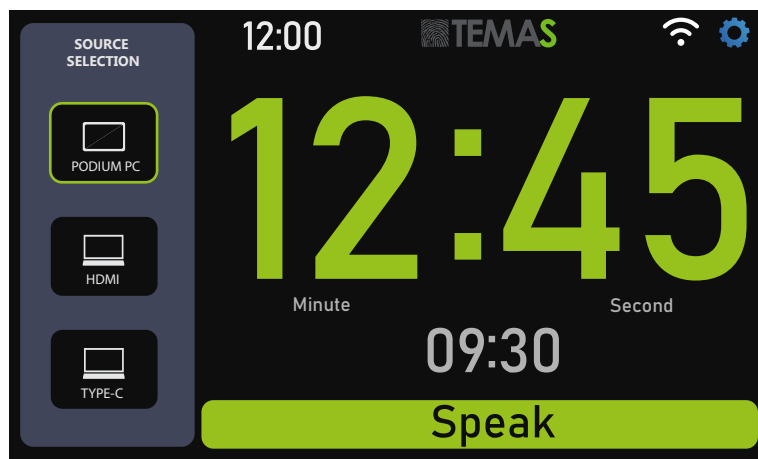




FRONT



BACK





Specifications	
Operating System	Windows 11 Pro
CPU	Intel i3
Chipset	Intel B560
Graphics	Integrated - Intel HD Graphics
Memory	8 GB
Storage	128 GB SSD
Wireless Data Network	Wi-Fi 6, Bluetooth 5.0, 2*2
LAN	10/100/1000 Mbps, Intel LAN
Side(Front) I/O Ports	4 x USB 3.2 Gen2 Type-A (1 w/QC), 1 x USB 3.2 Gen1 Type-C, 2 x Audio Jacks(optional)
Back I/O Ports	1x USB3.2 Gen1 Type-A, 2x USB2.0, 1x RJ45 LAN, 2x Display Port 1.2, 1x configurable ports (HDMI 2.0/VGA/COM/DP/LAN), 1x Kensington lock, 1x DC-in
Power Supply	150W - 19Vdc, 4.74A, 90W Power Adapter
Dimensions (W x D x H)	175 x 175 x 44.2 mm
Weight	1.3KG (HDD included)
Color	Black
Accessories	USB Keyboard & Mouse
Certificates	BSMI/CB/CE/FCC/UL/CCC/Energy Star/C-Tick/WiFi/RF/VCCI



## USB Distance Learning Visualizer

The AVerVision M5 is a USB visualizer specially made for distance learning and remote teaching. Its foldable, grab-and-go design lets you start online courses in mere moments. Simply adjust the camera head to self-view for a tutoring session, and then quickly find the best angle for demonstrating materials. Add in AVerTouch software's newest AI functions, and you can maximize teaching engagement even when livestreaming

<div style="border: 1px solid black; padding: 5px; width: 60px; margin: 0 auto;">8M</div> <p>3264 X 2448 (8M) Output Resolution</p>	<div style="border: 1px solid black; padding: 5px; width: 60px; margin: 0 auto;">16X</div> <p>16x Digital Zoom</p>	<div style="border: 1px solid black; padding: 5px; width: 60px; margin: 0 auto;">A3</div> <p>A3 Shooting Area</p>	<div style="border: 1px solid black; padding: 5px; width: 60px; margin: 0 auto;">  </div> <p>Super Resolution AI</p>	<div style="border: 1px solid black; padding: 5px; width: 60px; margin: 0 auto;">  </div> <p>Curve Flattening AI</p>
---	--	---	--	---

Visualizer Technical specifications	
Image Sensor	1/3.2" CMOS
Total Pixels	8 Megapixels
Output Resolution	Up to 3264x2448 (8M)
Zoom	16X Digital Zoom (via software)
Frame Rate	Full HD 1080P at 60fps
Shooting Area	Larger than A3 (420 X 315mm)
Focus	Auto / Manual (via software)


# Height Adjustment

## ■ Linak DL6 Lifting Column



The hallmarks of the DL6 are the 3-stage inline design meaning that the motor is hidden inside the profiles giving the column a very sleek and elegant design easy to integrate in various desk designs. The 3-stage construction ensures a very low built-in dimension meaning that people of all heights can use the desk. The very low noise level ensures pleasant use when driving.

- Max. thrust 700 N per column
- Max speed: 38 mm/s unloaded
- Bending moment: Max. 150 Nm dynamic
- Low and uniform noise level
- PVC-free column



### Specifications

Single or 2, 3, 4 parallel drive

Multi-parallel is possible only when in combination with CBD6S

Duty cycle: 10% ~ 2 minutes of continuous use at full load, followed by 18 minutes of pause

Ambient temperature: +5° to +40°C

## ■ Remote Control



The Hand Control HB10 wireless is designed for control podium remotely The HB10 wireless combines ergonomic design and functionality into a user-friendly hand control with big intuitive buttons and without any annoying cable.




- Hand control controlling 2 channels
- Easily operated by both left and right-handed persons
- Colour on top part is silver (RAL 7035) and the bottom part is a soft black rubber coating
- Simultaneous drive up and down
- Transmitter signal based on 433 MHz or Bluetooth® connection
- Long-life batteries included. Battery lifetime at normal use of 1 minute per day is about 10 years

# Application

## ■ Creapen Software


### Screen Annotation & Screen Recording Solution for Presentations

CreaPen is an extremely simple yet powerful screen annotation and recording software. You can easily write on top of any other application that is currently active on the desktop, even on a running video. You can then save your annotations as an image file or even record the whole session as a video for sharing. It is a useful tool for presenters to communicate and share ideas during a live session, for educators to create effective video tutorials and for salespeople to create impressive video presentations.

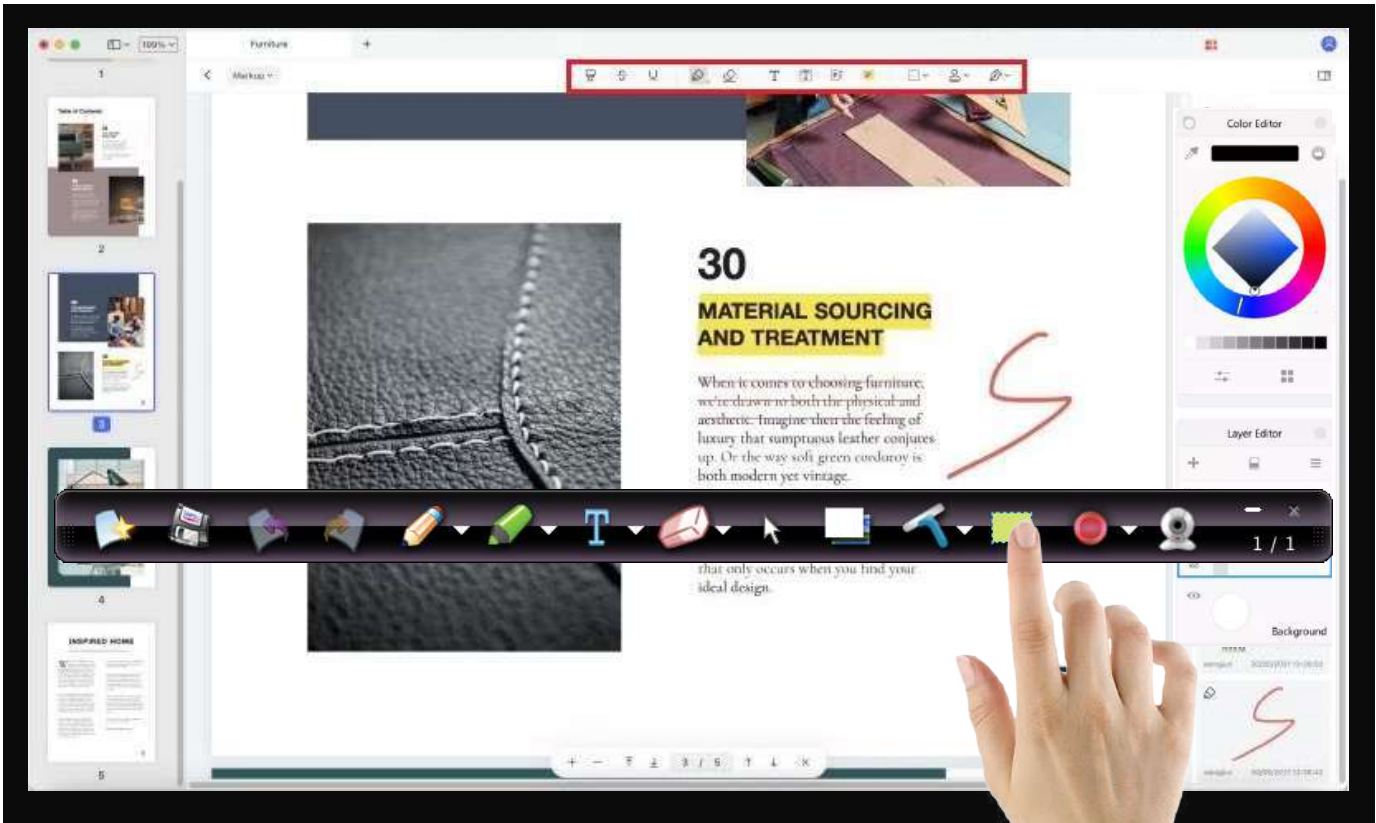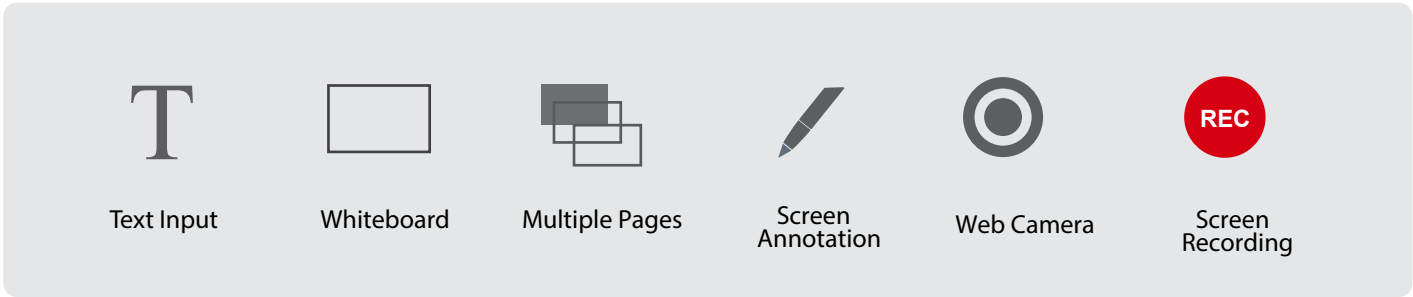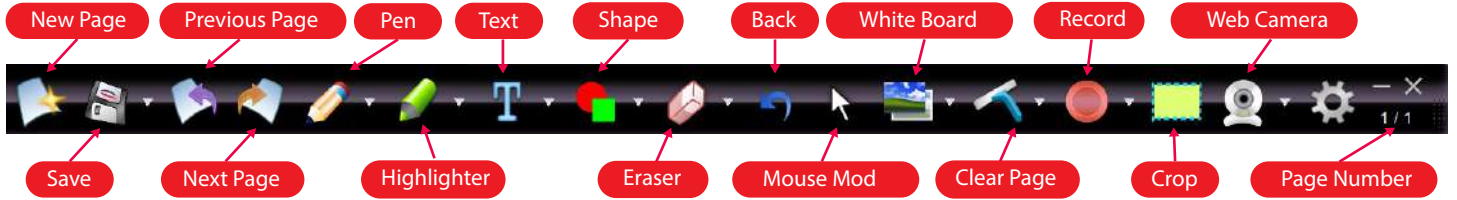


# Application

■ 5" Touch screen Timer & Clock

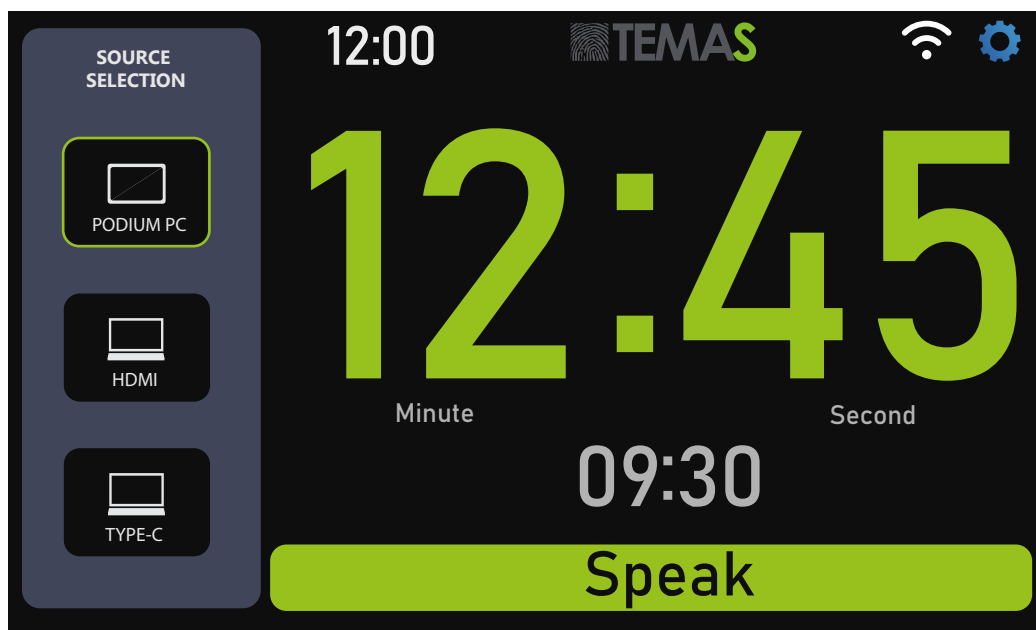

- Speak - Green: 80% of the entire speech
- Sum-up - Orange: The speaker is reminded to end
- End - Red: To remind the speaker to stop talking

## Settings

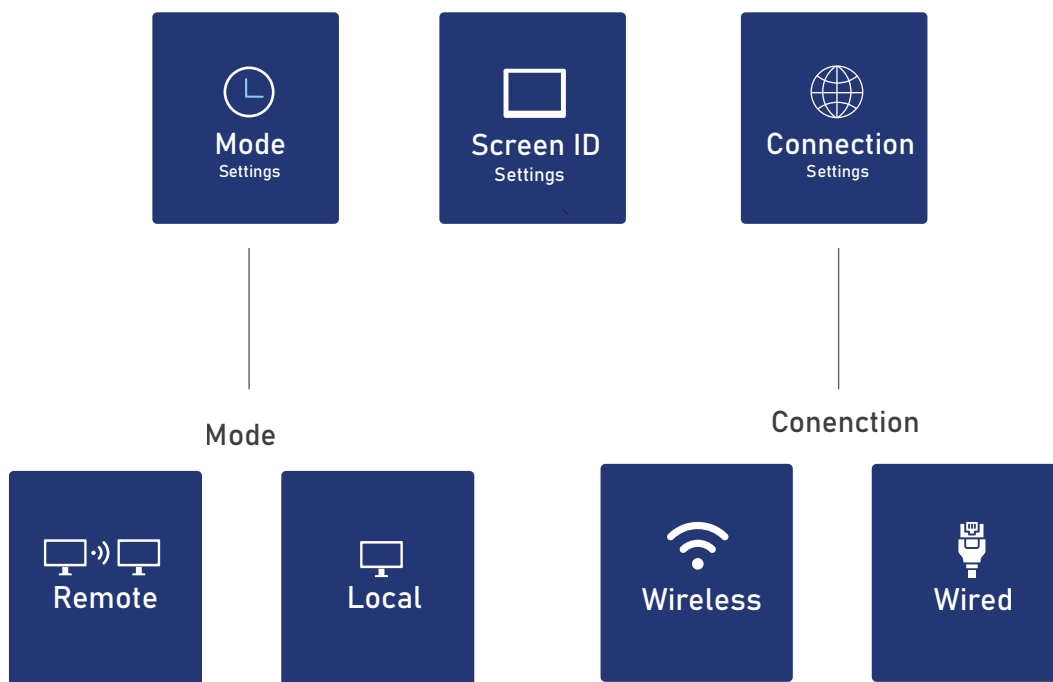

# Amplifier

## ■ Atlona Stereo/Mono Audio Amplifier



- AT-PA100-G2 is a class D amplifier which uses less energy, doesn't require heat sinks or power transformers, making it smaller than a class A/B amplifier
- Stereo, mono, and bridge audio speaker output connections available through captive screw
- Has a variable 3.5mm audio loop out for cascading to another AT-PA100-G2 or connecting to other audio amplifiers
- 3 pin captive screw MIC input can support balanced and unbalanced signals
- Energy efficient standby mode only requires 4W of power. AT-PA100-G2 goes into standby mode if an audio signal isn't present
- Control through the panel buttons, an (optional) IR remote, and RS-232
- 3 position input switch: 48V phantom power - best for condenser MICs without battery power
- MIC - Great for Dynamic MICs and battery powered condenser MICs Line - Connect a Wireless
- Volume, Bass, and Treble can be controlled through RS-232, IR, or panel buttons

Specifications	
Rated Output	20 W x 2 40 W x 1 (Bridged Operation)
Gain	32dB
Frequency Range	20Hz to 20KHz
Signal/Noise Ratio	80dB (at max output)
Total Harmonic Distortion	1% (1KHz), 0.3% (20KHz) -- at nominal levels
Input Impedance	Input 1&2: >10KΩ
MIC Input Impedance	48V: 35KΩ MIC: 10KΩ LINE: 75KΩ
Output Impedance	3.5mm Loop Out: 50Ω stereo Speaker out: 4 ~ 8Ω Amplifier
Stereo Channel Separation	75dB from 20Hz to 20KHz
Common Mode Rejection Ratio	70dB from 20Hz to 20KHz
MIC Audio Detection Delay	1ms
Temperature Operating	0°C to 40°C 32°F to 104°F
Temperature Storage	-20°C to 60°C -4°F to 140°F
Temperature Humidity	20 to 90% non-condensing
Power Consumption	40W
Power Idle Consumption	4W
Power Supply	Input: AC100~240V 50/60Hz Output: DC 24V/5A

## ■ Dual Cone Loudspeaker





The Apart CM4T is the ideal match between size and sound! Just one size bigger than a halogen-spot model (CM3T), this 70 /100 volt loudspeaker looks great and produces an amazing powerful sound.

### Features

- outside diameter in mm 135
- cutout in mm 108
- loudspeaker system dual cone
- woofer cone material coated paper
- colour white / black / silver
- 70V transformer power taps in watts 6 - 3 - 1.5 - 0.75
- low impedance dynamic power in watts 30
- SPL 1W/1m in dB 88
- frequency response in Hz 90 - 19K
- applicable low impedance yes

# MECHANICAL SPECIFICATIONS

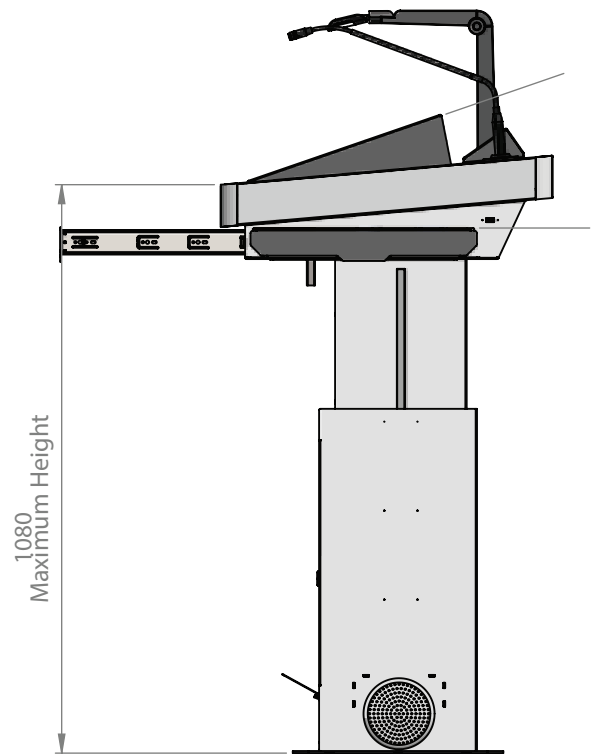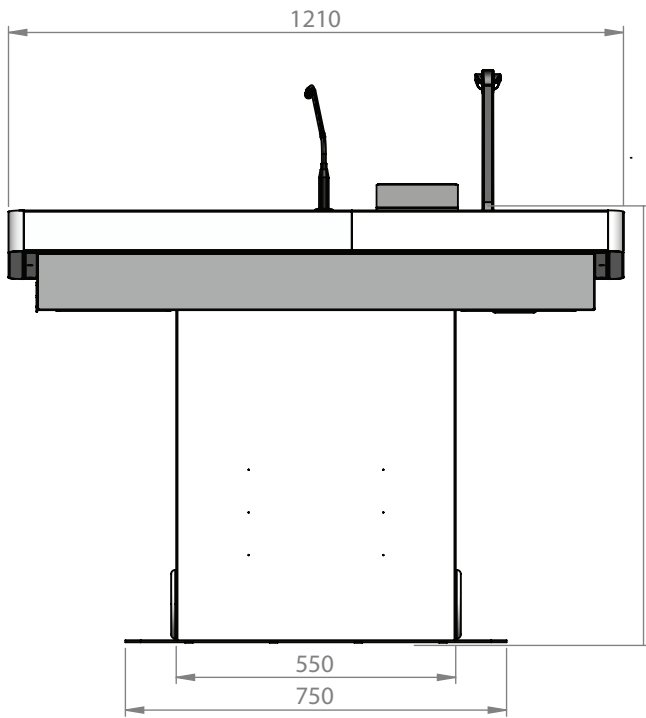

## ■ Technical specifications

	EP22A PRO
<b>■ Lecturer Panel</b>	<b>22"</b>
Screen	
Resolution	1920x1080
Brightness	250 cd/m2
Aspect Ratio	16:9
Number of Touch Point	10 Points Capacitive
<b>Lecturer Panel PC</b>	
CPU	Intel i3
RAM	8 GB
HDD	128 GB SSD
Operation System	Windows 11 Pro
<b>■ Microphone</b>	
Lenght	18"
No of Microphone	1 pcs
Output Connector	3-way XLR(Male)
Microphone Type	Cardioid
Frequency Response	50 - 18 kHz
Power ON Indicator	LED
<b>■ Visualizer</b>	
Image Sensor	1/3.2" CMOS
Total Pixels	8 Megapixels
Output Resolution	Up to 3264x2448 (8M)
Zoom	16XDigital Zoom (via software)
Frame Rate	Full HD 1080P at 60fps
Shooting Area	Larger than A3 (420 X 315mm)
Focus	Auto / Manual (via software)
<b>■ Outputs (Bottom of Podium)</b>	
HDMI	Available (Projector Out)
Ethernet	Network Connection
XLR for Microphone	3-way XLR(Male)
<b>■ Electrical Lifting Column for Height Adjustment</b>	
Movement	Vertical (Up/Down)
Control	By Buttons (Up/Down) and Remote Control
Speed	Max speed: 38 mm/s
Lifting Strength	700N
Locking System	Automatic Locking when engine not working
Engine Type	Electrical
<b>■ Mechanical Specs</b>	
Outline Dimesion(mm)Set	Min: 550 x 795 x 1210 Max:550 x 1080 x 1210
Outlibe Dimension(mm)Package	780 x 1350 x 1340
Weight(kg)	Set: 101 kg Package: 155 kg



Europe

**Temas Technology Co.Ltd.**

Serifali Mh, Bayraktar Bulvari, Kible Sk,  
No: 29 - 34775 Umraniye  
Istanbul - TURKIYE

Tel: +90 216 314 54 54  
info@temastechnology.com

USA

**Temas Technology LLC**

11417 Irving Park Rd, Suite No. B-9-4  
Franklin Park, 60131-3882,  
Illinois - USA

Tel: +1 630 489 6994  
sales@temastechnology.com

[www.temastechnology.com](http://www.temastechnology.com)