



Interactive Touch Screen Kiosk

Optimise user experience with an ergonomic angled screen

Main features

- Free-standing design with option to bolt down base plate
- Power & data feed from rear panel or floor through the base plate
- Anti-Glare protection glass over the screen
- Key lockable access service door
- Ergonomic and compact structure, User friendly, easy for maintenance



Touch technology - Capacitive

The Projective Capacitive (PCAP) touch technology with 12 touch points ensures a seamless and accurate touch response. With its AMVA3 LED panel, it offers exceptional colour performance, high contrast and wide viewing angles.

This technology uses a sensor-grid of micro-fine wires integrated into the glass that covers the screen. Touch is detected because electrical characteristics of the sensor grid change when human finger is placed on the glass. Thanks to the glass overlay this technology is highly durable, and the touch function remains unaffected even if the glass is scratched.



Smart Design

The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



Plug and Play

If there is no internet access available the screen can still be updated thanks to their backup USB update option.



24/7 Commercial Use

A commercial grade panel, with a lifespan of 50,000 hours and high quality compenents ensure that this display can be in constant use 24/7.



Screen Size	32"	43"	50"	55"
Model Number	K32VN	K43VN	K50VN	K55VN

Technical Specifications

Screen


Screen Size	32" 43" 50" 55"
Resolution	1920x1080 450
Brightness	cd/m2 16:9
Aspect Ratio	5000:1
Contrast Ratio	178:178
Viewing Angle	8ms
Response Time	

Touch

Touch Technology	PCAP - Projected Capacitive
Touch Points	Multi Touch
Response Time	8 ms
OS	Windows, Linux
Protection Glass	Tempered Anti Glare
Touch interface	USB
Touch method	finger

Other

Application	Indoor
Colour	Black & White
Installation	Floor bolting / Free Standing
Enclosure	Metal
Working temperature	0°C~50°C
Power supply	AC 100-240V 50/60HZ

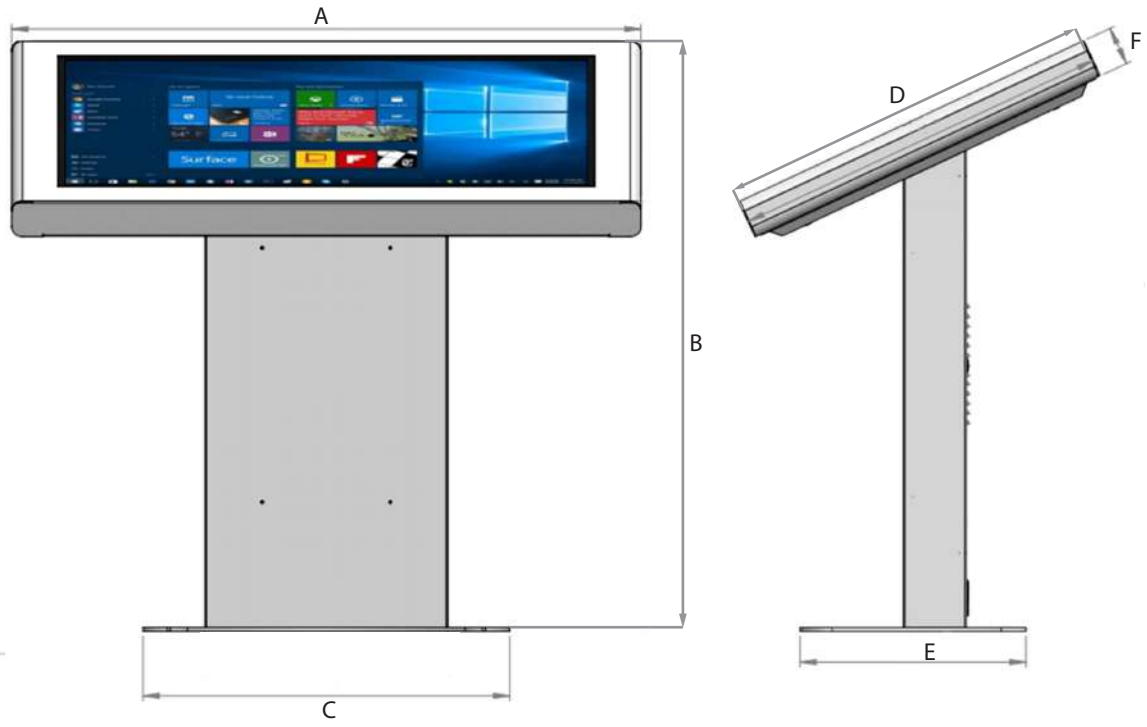

Dimension (mm)

Size	Model Name	A	B	C	D	E
32"	K32VN	835	1153	606	528	450
43"	K43VN	1098	1183	655	663	465
50"	K50VN	1296	1169	755	783	465
55"	K55VN	1405	1169	700	841	700



Temas Technology Co., Ltd.
 Serifali Mahallesi, Kible Sokak, No: 29 34775
 Yukarı Dudullu / Umraniye / İstanbul / Türkiye
 Tel +90 216 314 54 54 - Fax +90 216 394 44 98
 info@temasteknoloji.com.tr - www.temasteknoloji.com.tr